

POND 4 (dry)
 Bed Level - 80.900m AOD
 Bank Level - 82.475m AOD
 Top Water Level - 82.175m AOD
 Storage Volume - 4400m³
 Overall Cut - 10,655m³
 Overall Fill - 39m³

| | | | | |
|-----|---------------------------------------------------------------|----------|-------|---------|
| Rev | Description | Date | Drawn | Checked |
| B | Revised Pond 4. Top of water level and arrow gradients added. | 28.04.21 | AG | PMW |
| A | Tender issue | 01.04.21 | PMW | PMW |

Drawing Approval Status:-
 N/A Section 104 N/A Section 38 N/A Section 278

FOR TENDER

Wormald Burrows
 Civil Engineering Consultants
 12a - 18a Hitchin Street, Biggleswade, SG18 8AX
 Tel: (01767) 317244 Web: www.wormburp.com Email: engineer@wormburp.com

Project:
Haverhill, Boyton Place

Drawing Description:
Pond 4 Details and Sections

Client:
PERSIMMON
 Persimmon Homes (Suffolk) Limited
 Prion Court
 Great Blakenham
 Ipswich IP6 0LW


Drawing Number:
E3838/533B

Client Reference:

Scale:
 1:250 @ A1
 1:500 @ A3

Designed By: TJW Drawn By: JMW Checked By: []
 Date: 15.05.19 Date: 24.07.19 Date: []

Certified by Afnor UK

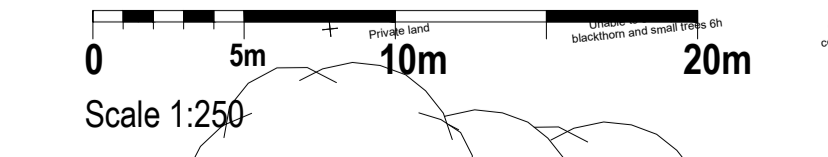

©This drawing is Copyright, Wormald Burrows Partnership Limited 2018.