
 VW0233.NSS.M2B4P  
 GROUND FLOOR PLAN

VW0235.NSS.M2B4P-1

VW0233.NSS.M2B4P-1

(P) (DENOTES : PRINCIPLE PRIVATE ENTRANCE NOMINATED AS STEP FREE ACCESS. ENTRANCE DOOR TO COMPLY WITH PROVISIONS A.1. OF PARAGRAPH 2.20 PART M4(2) PRIVATE ENTRANCES: WITH A LEVEL EXTERNAL LANDING MIN. WIDTH/DEPTH OF 1200MM. FULLY DIFFUSED AUTOMATED LIGHTING TO BE PROVIDED TO ENTRANCE.)

850 COW (DENOTES : ENTRANCE DOORS TO HAVE 850mm CLEAR OPENING WIDTH, IN ACCORDANCE WITH PART M4 (2) DIAGRAM 2.2.)

750 COW (DOUBLE DOORS NOT CLASSED AS PRINCIPLE OR ALTERNATIVE ENTRANCE TO HAVE ONE OR BOTH LEAVES WITH 750MM CLEAR OPENING WIDTH OR BE ABLE TO BE OPERATED WITH SINGLE ACTION REASONABLY ACCESSIBLE TO WHEELCHAIR USER.)

NOTE : PLEASE REFER TO SITE LAYOUT FOR AN ALTERNATIVE PRIVATE ENTRANCE WHERE A STEP FREE ACCESS CANNOT BE ACHIEVED TO THE PRINCIPLE PRIVATE ENTRANCE.

LEVEL EXTERNAL LANDING IS COVERED BY PORCH, MIN. WIDTH OF 900mm AND DEPTH OF 600mm FULLY DIFFUSED AUTOMATED LIGHTING TO BE PROVIDED TO ENTRANCE

300 (DENOTES : 300mm NIB IS PROVIDED TO THE LEADING EDGE OF ALL DOORS ON THE ENTRANCE STOREY.)

300 (DENOTES : PRINCIPLE PRIVATE ENTRANCE A 300mm NIB IS PROVIDED TO THE LEADING EDGE AND THE EXTRA WIDTH MAINTAINED 1200mm BEYOND IT.)

1200mm MIN. CLEAR SPACE IN FRONT OF AND BETWEEN ALL KITCHEN UNITS & APPLIANCES.

(PW) (DENOTES : PRINCIPLE LIVING SPACE, GLAZED DOOR OR WINDOW CILL TO START MAX 850MM AFFL. HANDLE OF 1NO. MIN. WINDOW IN PRINCIPLE LIVING AREA BETWEEN 450MM - 1200MM AFFL. UNLESS FITTED WITH REMOTE OPENING DEVICE WITHIN THIS HEIGHT RANGE.)

(WH) (DENOTES: ALL OTHER WINDOWS TO HAVE HANDLES LOCATED BETWEEN 450MM-1400MM AFFL. UNLESS FITTED WITH A REMOTE OPENING DEVICE THAT IS FITTED WITHIN THIS HEIGHT RANGE.)

- BOILER TIMER CONTROLS & THERMOSTATS SHOULD BE EITHER: MOUNTED BETWEEN 900MM AND 1200MM ABOVE FINISHED FLOOR LEVEL ON THE BOILER, or
- HAVE SEPARATE CONTROLLERS (WIRED or WIRELESS) MOUNTED ELSEWHERE IN AN ACCESSIBLE LOCATION WITHIN THE SAME HEIGHT RANGE

ALL WALLS, DUCTS AND BOXINGS TO THE WC/CLOAKROOM, BATHROOM AND SHOWER ROOM SHOULD BE STRONG ENOUGH TO SUPPORT GRAB RAILS, SEATS AND OTHER ADAPTATIONS THAT COULD IMPOSE A LOAD OF UP TO 1.5kN/m<sup>2</sup>

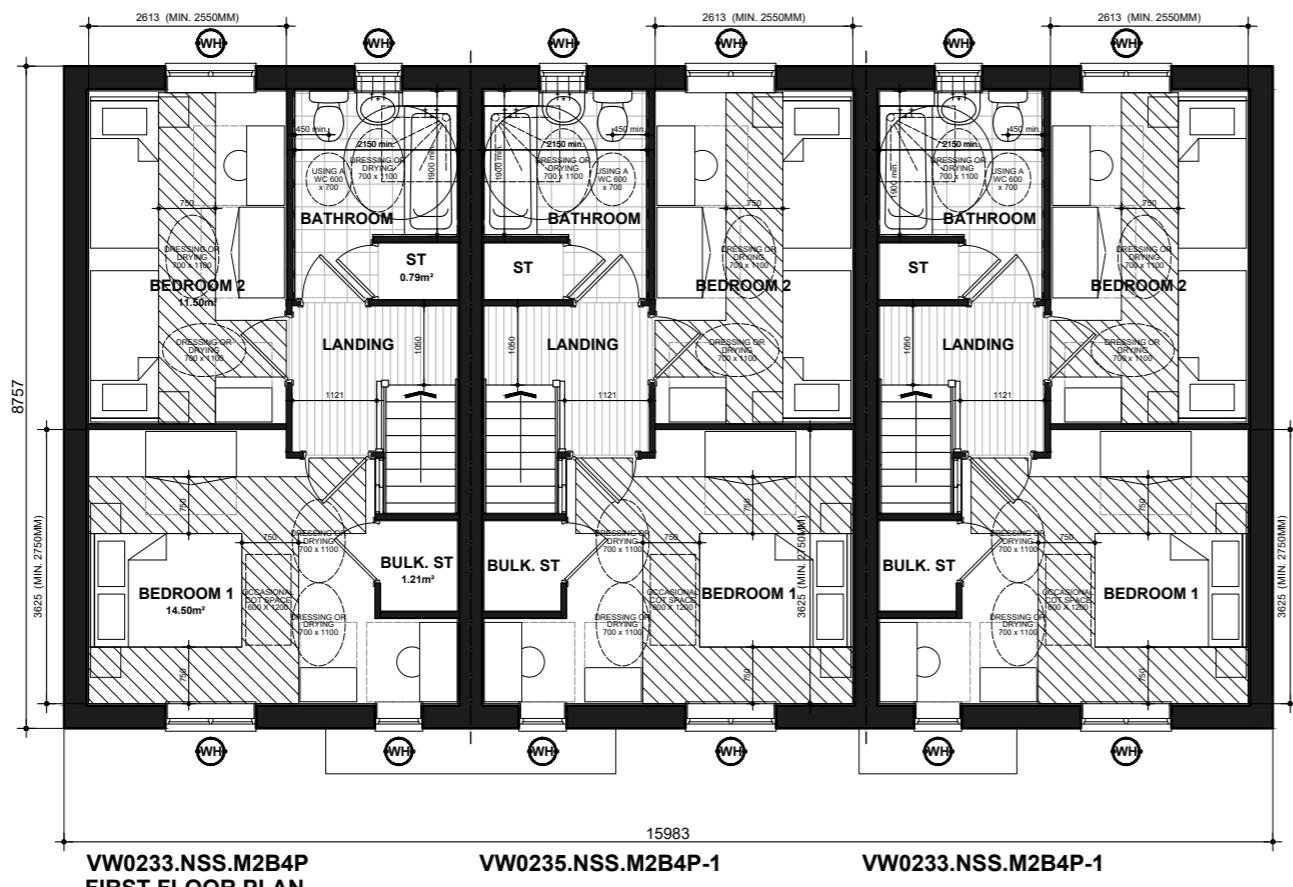
ACCESSIBLE BATHROOM WITH WC/BASIN/BATH ON THE SAME FLOOR AS THE PRINCIPLE DOUBLE BEDROOM.

**BED REFERENCES:**  
 KSB - KING SIZE BED 1500 X 2000  
 DB - DOUBLE BED 1900 X 1350  
 SB - SINGLE BED 900 X 1900

DOUBLE BEDROOM (PRINCIPLE) TO HAVE 750mm CLEAR ACCESS ZONE TO BOTH SIDES AND FOOT OF BED.

SINGLE OR TWIN BEDROOM TO HAVE 750mm CLEAR ACCESS ZONE TO ONE SIDE OF BED.

REFER TO DETAILS IS906.1 & IS906.2 FOR


 VW0233.NSS.M2B4P  
 FIRST FLOOR PLAN

VW0235.NSS.M2B4P-1

VW0233.NSS.M2B4P-1



| National Space Standards         |                           |                     |
|----------------------------------|---------------------------|---------------------|
| NSS.M2B4P                        | Actual Area               | NSS Requirement     |
| Ground Floor Plan                | 39.50m <sup>2</sup>       |                     |
| First Floor Plan                 | 39.50m <sup>2</sup>       |                     |
| Total Floor Area m <sup>2</sup>  | <b>79.00m<sup>2</sup></b> | 79.00m <sup>2</sup> |
| Total Floor Area ft <sup>2</sup> | 850ft <sup>2</sup>        | 850ft <sup>2</sup>  |
| Bedroom 1                        | 14.50m <sup>2</sup>       | 11.5m <sup>2</sup>  |
| Bedroom 2                        | 11.50m <sup>2</sup>       | 11.5m <sup>2</sup>  |
| Bulkhead Store                   | 1.21m <sup>2</sup>        |                     |
| Bathroom Store                   | 0.79m <sup>2</sup>        |                     |
| Built in Store Total             | 2.00m <sup>2</sup>        | 2.0m <sup>2</sup>   |

# Sansom

## FLOOR PLAN

### LW0074.PL-03

DATE: MAY 2021 REV:  
 SCALE: 1:100 @ A3

DRAWN: SG  
 CHECKED: GPM

79.00 m<sup>2</sup>  
 850 ft<sup>2</sup>

**BLOOR HOMES**